



SENTRY FIRESHIELD

Premium Roller Shutters by **ZROLL**

BAL 40 BUSHFIRE PROTECTION

Designed for bushfire-prone regions where strength, security and fire protection are critical.



EXTRUDED ALUMINIUM CONSTRUCTION

Non-combustible and corrosion resistant for long-term durability.



BAL 40 BUSHFIRE PROTECTION

Achieves BAL 40 for the highest level of bushfire protection.



COMMERCIAL APPLICATIONS

Ideal for commercial, industrial and high-risk residential applications.



QLD HOUSEHOLD RESILIENCE PROGRAM APPROVED

Funding to help eligible home owners in coastal parts of Queensland.



AUSTRALIAN MADE

Manufactured and designed in Australia for Australian homes and conditions.

**WHEN BUSH-FIRE PRONE AREAS
ARE AT THEIR MOST VUNRABLE,
SENTRY FIRESHIELD PROTECTS.**



LEARN MORE

Scan to explore Fireshield and technical resources.




BUILT STRONG. BUILT TO PROTECT

BUILT FOR BUSHFIRE-PRONE AREAS

The Sentry Fireshield is purpose-built to help protect people, property and assets in bushfire-prone environments. The overall profile appearance is clean and stylish with only a slight "V" groove line on the convex side. Available in several long lasting and fade resistant Interpon coatings or a natural anodized finish, the Sentry Fireshield Profile can also be powder coated in a colour of your choice.

Superior Strength Extruded Aluminium

Increased security
and performance.

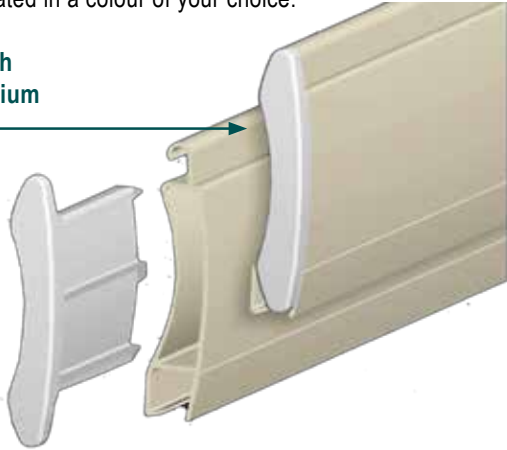

RESTRAINED GUIDE OPTION

Provides additional retention and resistance for high-wind applications.




FIRESHIELD PERFORMANCE COMPARISON

FEATURE	STANDARD ROLLER SHUTTER	SENTRY FIRESHIELD
* Slat Material	Rollformed Aluminium	Extruded Aluminium ✓
* Fire Protection	Not Rated	BAL 40 Rated ✓
* Security	Residential Grade	Commercial Grade Security ✓
* Construction	Standard	Heavy-Duty Extruded ✓
* Best Suited for	General Residential	Bushfire-prone & Commercial ✓

COLOUR RANGE

A range of colours to
compliment any home.

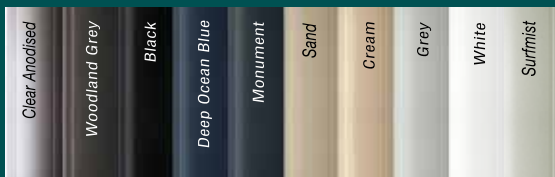

TECHNICAL DETAILS

- Extruded Aluminium Profile
- Profile Slat Height: 40mm
- Profile Slat Thickness: 9mm
- Gauge of Aluminum: 1mm
- Maximum Recommended Area: 12m²
- Suitable for large openings in both residential and commercial applications.

SCAN TO VISUALISE

Upload a photo and visualise
different shutters and colours
on your building.



PERFORMANCE & ENGINEERING



STRENGTH

Commercial-grade protection for homes and buildings in high-risk environments. Non-combustible and corrosion resistant, built to last.



SECURITY

Enhanced profile strength for increased protection and peace of mind.



RESTRAINED GUIDE

Optional restrained guide system for enhanced retention and performance.



ENGINEERING & TESTING

- BAL 40 Rating for highest level of bushfire protection.
- Engineered for large openings with exceptional strength and stability.
- Project-specific engineering available.
- Refer to certification documentation for full details.